

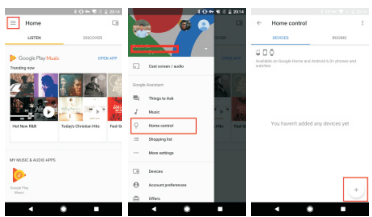








| | | | | | | | | | | | |
|----|----|---|---|--|---|--|---|---|---|--|---|
| 52 | 52 | <h3>Enable Our skill in Alexa APP</h3> <ul style="list-style-type: none"> Choose "Skills" in the options bar, then search "Tuya Smart" in the input box; Select "Tuya Smart" in the search results, then click "Enable Skill". <p>(Note: If there are more than one test, there will be the interface on the right, which indicates that the account has been bound. You can click on the "Disable Skill" to remove the binding, then click on the "Enable Skill" to continue to bind a new Tuya Smart account.)</p> <ul style="list-style-type: none"> Input the user name and password that you had previously registered in Tuya Smart APP. |  | <h3>Discover Devices in "Alexa" APP</h3> <ul style="list-style-type: none"> Firstly, you should say to Alexa: "Alexa(Echo), discover my devices." Alexa will start to finding the devices which is added in Tuya Smart APP, it will take about 20 seconds to show result. Or click "Discover devices" in Alexa APP, it will show the devices that found successfully. <p>(Note: Any change of the device name in Tuya Smart APP, should re-discover the device in Alexa(Echo) again.)</p> |  | <h3>Voice Control Smart Device by Amazon Alexa</h3> <p>(Note: "Alexa" is one of the wake-up name of Amazon Alexa, which can be any of these three names (Settings): Alexa/ Echo/ Amazon.)</p> <ul style="list-style-type: none"> Voice Command and Control: User can control devices by instructions like below: Alexa, turn on [bedroom socket]. Alexa, turn off [bedroom socket]. Alexa, turn on [Kitchen's fan]. Alexa, turn off [Kitchen's fan]. <p>Note: [Bedroom socket] and [Kitchen's Fan] is the name you edited when you add the smart device to Tuya Smart APP</p> | <h3>Preparation for Google Home</h3> <ul style="list-style-type: none"> Google Home APP Google account (Users need to register their own Google account.) Tuya Smart APP Tuya Smart APP account (Users need to register their own account.) Google Home device Our smart devices (For example, smart socket) <p>(Note: Re-name the device after configuring successfully. The name of the device is recommended to use easy pronunciation of the English words)</p> | <h3>Link Smart Life Account in Home Control</h3> <p>(Note: Your Google Home is already set up, then skip to this step.)</p> <ul style="list-style-type: none"> Due to the Google Home APP's known bug, you could only use the first Google Home account you signed in can be used for "Our Smart Devices". |  | <ul style="list-style-type: none"> Tap "Home Control" in the hamburger menu on the Google Home APP's home page, then tap"+". Find "Smart Life" in the list. In the new window, select your Smart Life account's region, type your Smart Life account and password, then tap"Link Now!". After your assign rooms for devices, your devices will be listed in the Home Control page.  | <h3>Voice Control Smart Device by Google Home</h3> <p>(Note: "Hey Google" is the wake-up name of Google Home.)</p> <ul style="list-style-type: none"> Voice Command and Control: User can control devices by commands like below: Hey Google, turn on [Bedroom socket]. Hey Google, turn off [Bedroom socket]. Hey Google, turn on [Kitchen's Fan]. Hey Google, turn off [Kitchen's Fan] <p>(Note: [Bedroom socket] and [Kitchen's Fan] is the name you edited when you add the smart device to Tuya Smart APP.)</p> |
|----|----|---|---|--|---|--|---|---|---|--|---|

| | | | | | | | | |
|---|---|---|--|--|--|--|--|--|
| <h2>Smart Socket EU Mini Instruction</h2> | <h3>Parameters</h3> <ul style="list-style-type: none"> Product: Smart Socket EU Mini Rated Voltage: 100-240V Rated Current: 16A(Max.) AC Frequency: 50-60Hz Max. Power: 3400W for 240V  | <h3>Part 1: Download & Registration</h3> <ul style="list-style-type: none"> Scan the QR code to download "Tuya Smart" APP from APP Store or Google Play. Launch TuyaSmart APP and follow the in-app instruction to register an account and connect the Smart Socket to your 2.4 GHz Wi-Fi home network. You will be asked to provide your phone number during account registration in order to receive verification code.  | <h3>Part 2: Easy Mode (Recommend)</h3> <ul style="list-style-type: none"> Preparation: Device has connected with electricity, long press On/Off button for 5 seconds until indicator light quickly flashes, the application already stepped into "Devices" interface. Phone has connected to WiFi router and been able to connected to Internet. Tap the icon "+" at the top right corner of "Devices". Make sure the indicator light is flashing quickly, then tap the related button in application. Choose the local WiFi and enter the correct password, tap "Next". Wait for configuring successfully, then tap "Done". | <h3>Part 3: AP Mode</h3> <ul style="list-style-type: none"> If failed in EZ mode, automatically skip to AP mode or tap the icon "+" at the top right corner of "Devices". Enter into "Add Device", tap "AP Mode" at the top right corner. Long press On/Off button until indicator light slowly flashes, then tap the related button in application, enter into another interface, tap "Next". Tap "Connect now", choose WiFi hotspot named "SmartLife-XXXX", then back to "Tuya Smart" application. Wait for configuring successfully, then tap "Done". Users could rename the device through tapping the icon  in the middle of interface. | <h3>Part 4: Profile</h3> <ul style="list-style-type: none"> Profile is the entrance for the users to manage personal information, mainly show the following information (See chart):  | <h3>Notice</h3> <ul style="list-style-type: none"> Please check if there is damage caused by transportation. If yes, please contact supplier for replacement. Please follow the specification instruction and notice to keep products in a good and safe use condition. Put the socket in proper condition and out of reach of the Children. Plug in fully to the socket while using. The total power of being electric connected appliances could not be larger than the maximum power of the socket. Do not disassemble or install the socket, otherwise there might cause security risks. | <h2>Using Amazon Echo & Google Home Quick Guide</h2>  | <h3>Preparation for Amazon Alexa</h3> <ul style="list-style-type: none"> Amazon Alexa APP Amazon Alexa account (Users need to register their own account) Tuya Smart APP Tuya Smart APP account (Users need to register their own account.) Echo, Echo Dot, Tap and other Amazon voice-operated devices Our smart device (For example, Smart Socket) <p>(Note: Rename the device after configuring successfully. The name of the device is recommended to use easy pronunciation of the English words)</p> |
|---|---|---|--|--|--|--|--|--|