






## SIREN ALARM

### INSTRUCTION



Thanks for  
Choosing our WiFi Smart Home Sensors

### Product Configuration

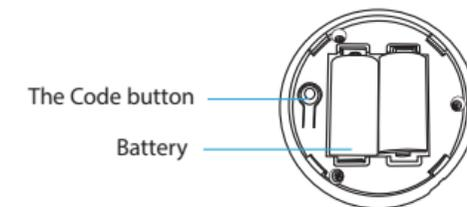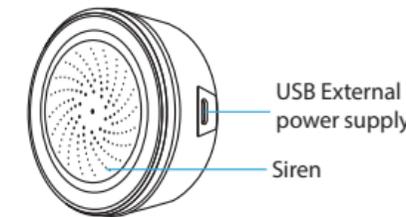

**Notice:** Please use USB power supply, the backup battery can only work for two days. Plug in the USB power supply and load the battery at the same time, then the sensor will work in priority.

### Specifications

USB Power adapter: 5V/1A  
Max current: 60mA  
sound intensity: 90db/1M  
Wireless type: 2.4GHz  
Wireless standard: IEEE 802.11b/g/n  
Wireless range: 45M  
Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)  
Operating Humidity: 20% ~ 85%  
Storage Temperature: 0°C ~ 60°C (32°F ~ 140°F)  
Storage Humidity: 0% ~ 90%  
Size: 68 mm x68 mm x33mm



### LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes quickly
AP mode	Indicator flashes slowly
Triggered	The indicator will rapidly blink, and OFF after scheduled time
Reset	Indicator lights up for 4s and after 2 seconds lights off, device goes into configuration mode

### How to reset?

- (1) Press the reset button for 6 seconds till the indicator flash rapidly. Then device turns to smart wifi mode.
- (2) Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

### Get Started with Tuya Smart App

#### 1. Download APP

- Download the "Smart life" app from APP Store or Google Play to your mobile.




#### 2. Register and Login

- Launch the "Smart life" app.
- To register, enter your mobile phone number or email address, create a password, then login to the app.
- Login if you have an account already.**

#### 3. Add Device

- Power on the smart sensor which default's mode is **Smart WiFi** mode.
- Select the "+" symbol on the top right-hand corner.
- Select your product type and follow the instructions of the app.
- If the connecting fails, try using AP Mode**
- On the "Add device" page select "AP Mode" on the top right-hand corner and follow the instructions of the app.
- Finally, have fun!

### What's the App User Interface Like ?

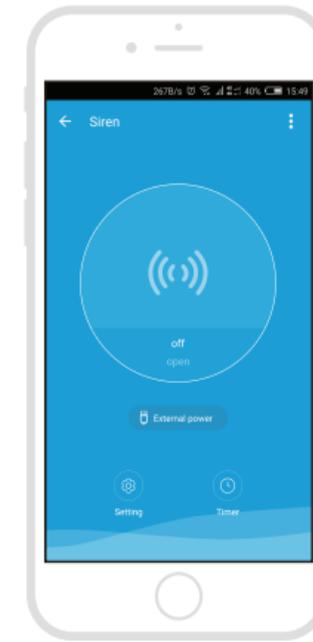

Smart life

### Experience Advanced Features

You can experience the various advanced features of the product with the app, just try and do it yourself.

#### Main function

- Setting Alarm duration and alarm sound type
- Scheduled alarm: it will have around 30s deviation

#### Linkage alarm setting

- To connect two Sensors via scene setting.

#### Device sharing

- Allow others to control the device

#### Push notification

- Open/close push notification

#### Remove device

- Restore default settings; Delete and add the device again to clear the record by APP.



Make Your Home Smarter